


# DELUXE QUICK-DISCONNECTS COMPATIBLE WITH VERMEER® RIGS

Minimize nozzle plugging during rod break out with our Deluxe Quick-Disconnect, featuring a built-in check valve. Carbide wear buttons extend the life of your quick-disconnect in the high-wear area immediately behind the hex collar.

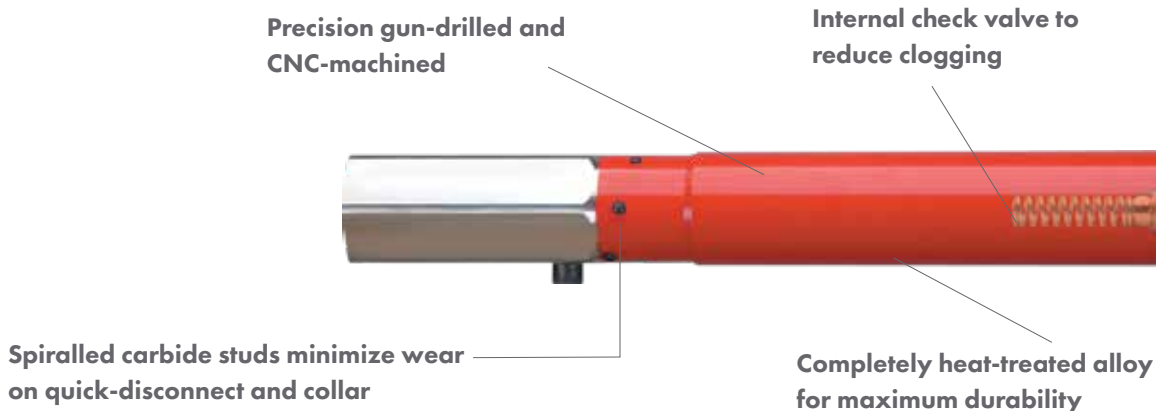

# VALUE QUICK-DISCONNECTS COMPATIBLE WITH VERMEER® RIGS

Quality and compatibility is assured by 100% thread inspection and unique single-setup machining process. We use chrome-moly steel produced by US Mills that matches our specs to create the highest strength and longest life quick-disconnect available.



For Vermeer® Drill Rigs with Low-Profile Quick-Disconnect Thread						
Drill Rig Model	Deluxe Quick-Disconnect	Value Quick-Disconnect	Standard Collar	Carbide Stud	Chunky Carbide	Carbide Cutters
D7x11		VLRV-31F-L42F-XL	VLR-20-HC	VLR-20-HC-C	VLR-20-HC-HFC	VLR-20-HC-HFCS
D7x11 Series 2		VLRV-31F-L42F-XL	VLR-20-HC	VLR-20-HC-C	VLR-20-HC-HFC	VLR-20-HC-HFCS
D9x13 Series 2		VLRV-31F-L42F-XL	VLR-20-HC	VLR-20-HC-C	VLR-20-HC-HFC	VLR-20-HC-HFCS
D10x15		VLRV-31F-L42F-XL	VLR-20-HC	VLR-20-HC-C	VLR-20-HC-HFC	VLR-20-HC-HFCS
D16x20	VLR-32F-L43F	VLRV-32F-L43F	VLR-25-HC	VLR-25-HC-C	VLR-25-HC-HFC	VLR25-HC-HFCS
D16x20 Series 2	VLR-32F-L43F	VLRV-32F-L43F	VLR-25-HC	VLR-25-HC-C	VLR-25-HC-HFC	VLR25-HC-HFCS
D20x22	VLR-30F-L43F-XXL	VLRV-30F-L43F-XXL	VLR-25-HC	VLR-25-HC-C	VLR-25-HC-HFC	VLR25-HC-HFCS
D24x26	VLR-30F-L43F	VLRV-30F-L43F	VLR-25-HC	VLR-25-HC-C	VLR-25-HC-HFC	VLR25-HC-HFCS
D24x30	VLR-40F-L43F	VLRV-40F-L43F	VLR-25-HC	VLR-25-HC-C	VLR-25-HC-HFC	VLR25-HC-HFCS
D23x30, S2, S3	VLR-40F-L43F	VLRV-40F-L43F	VLR-25-HC	VLR-25-HC-C	VLR-25-HC-HFC	VLR25-HC-HFCS
D36x50, FS650 thread	VLR-46F-L43F	VLRV-46F-L43F	VLR-25-HC	VLR-25-HC-C	VLR-25-HC-HFC	VLR25-HC-HFCS
D36x50, FS700 thread	VLR-41F-L43F	VLRV-41F-L43F	VLR-25-HC	VLR-25-HC-C	VLR-25-HC-HFC	VLR25-HC-HFCS