

BREAKAWAY CONNECTORS & PINS

Designed to protect polyethylene ducting from overload during installation.

Keep the assembly shorter by using the Breakaway Swivel. Or use the Breakaway Connector with your existing swivel and higher break points.

Light-Duty Breakaway Swivel

Break strengths from 750 lb to 2,500 lb

Utilizes up to 5 pins that are designed to break in tension at a specific load




Medium-Duty Breakaway Swivel

Break strengths from 750 lb to 12,500 lb

Protect your duct from failure

Designed to protect polyethylene ducting from overload during installation

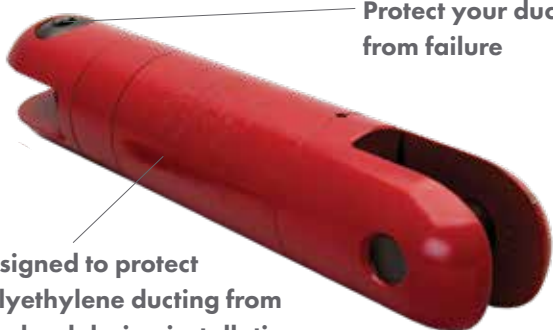

Light-Duty Breakaway Connectors and Pins	
Description	Part #
Breakaway Connector	00560-010
Pin Kit (5 per kit)	Part #
750 lb. pin kit	00565-075
1,000 lb. pin kit	00565-100
1,500 lb. pin kit	00565-150
2,000 lb. pin kit	00565-200
2,500 lb. pin kit	00565-250

Heavy-Duty Breakaway Connectors and Pins	
Description	Part #
Breakaway Connector	00560-020
Pin Kit (5 per kit)	Part #
3,000 lb. pin kit	00565-300
6,000 lb. pin kit	00565-600
7,000 lb. pin kit	00565-700
8,000 lb. pin kit	00565-800
9,000 lb. pin kit	00565-900

Breakaway Swivel	
Description	Part #
Pins you can use: 00565-075 - 00565-250	
2.5 Ton Swivel Capacity	00570-202
7.5 Ton Swivel Capacity	00570-208

Light-Duty Breakaway Connector

Break strengths from 750 lb to 12,500 lb



Heavy-Duty Breakaway Connector

Break strengths from 3,000 lb to 45,000 lb



Color-Coded Breakaway Pins

