


SWIVEL DIMENSIONS FOR PULLING EYES

Check here for all the dimensions you need to ensure a secure fit.

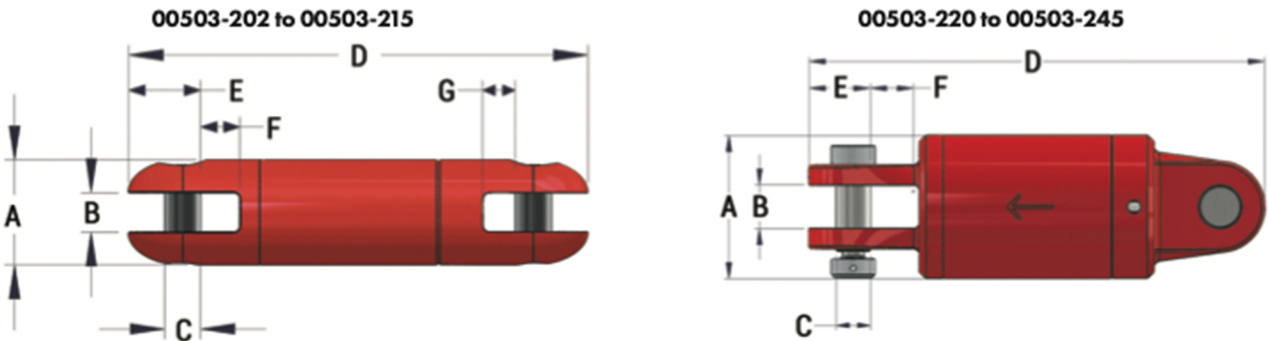


VALUE DUB SWIVELS®

PART NO.	LOAD RATING	A	B	C	D	E	F	G	WEIGHT	COMPATIBLE PULLING EYES
00503-202	5,000 LB	1-1/4"	1/2"	13/32"	4-31/32"	3/4"	1/2"	9/16"	1 LB	-
00503-204	8,500 LB	2"	3/4"	11/16"	8-3/4"	1-3/8"	5/8"	3/4"	5 LB	21M-EYE304 44M-EYE304 85-F31X-EYE304
00503-205	10,000 LB	2-1/4"	7/8"	3/4"	9-5/8"	1-1/2"	3/4"	7/8"	7 LB	21M-EYE305 44M-EYE305 45M-EYE305 85-F31X-EYE305
00503-208	15,000 LB	2-1/2"	1"	7/8"	11-1/4"	1-3/4"	7/8"	1"	10 LB	21M-EYE310 23M-EYE310 44M-EYE310 45M-EYE310 85-F31X-EYE310
00503-210	20,000 LB	2-1/2"	1"	7/8"	11-7/8"	1-3/4"	7/8"	1"	11 LB	21M-EYE315 23M-EYE315 27M-EYE315 45M-EYE315 85-F31X-EYE315
00503-215	30,000 LB	3"	1-5/16"	1-1/8"	14"	2-1/4"	1-1/8"	1-1/4"	17 LB	23M-EYE820 27M-EYE820 29M-EYE820
00503-220	40,000 LB	4-3/4"	1-3/4"	1-1/8"	16-1/2"	2-1/16"	1-7/16"	-	49 LB	27M-EYE820 29M-EYE820
00503-230	60,000 LB	5-3/4"	1-3/4"	1-3/8"	18-1/4"	2-1/2"	1-7/16"	-	76 LB	27M-EYE820 29M-EYE820
00503-245	90,000 LB	6"	1-3/4"	1-3/8"	19-3/8"	2-1/2"	1-7/16"	-	88 LB	27M-EYE820 29M-EYE820

Choosing a swivel:

- » **SEALS:** Your swivel should feature a strong sealing system. The seals keep the drilling fluid, sand, and environmental conditions from getting to the bearings. If any of this reaches the bearings, it's not long before your swivel is just a shaft. For drilling in harsh environments, consider a multi-stage sealing system.
- » **BEARING LIFE:** Make sure your swivel has a high safety factor rated for HDD. Utilize a swivel at 10% above its rated capacity and you will decrease bearing life by 25%. Use a swivel at 10% below its rated capacity and you will increase bearing life by 40%.

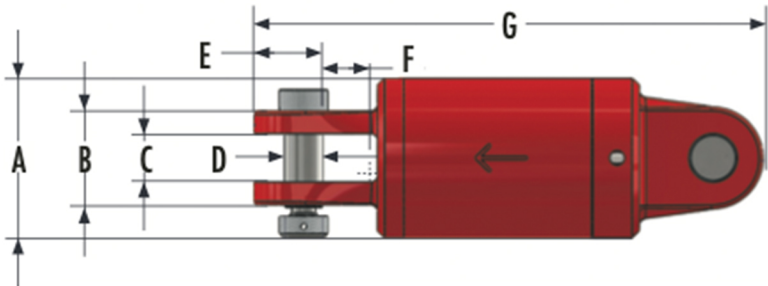

i Swivels have an arrow engraved to show pullback direction for best bearing life

DELUXE DUB SWIVELS®

PART NO.	LOAD RATING	A	B	C	D	E	F	G	WEIGHT	COMPATIBLE PULLING EYE
00508-202	5,000 LB	2"	2"	1"	11/16"	1-3/16"	13/16"	7-1/2"	4 LB	-
00508-205	10,000 LB	3-1/8"	2-1/4"	1-1/4"	3/4"	1-1/4"	1-1/4"	11-1/16"	15 LB	21M-EYE805
00508-210	20,000 LB	3-3/4"	2-3/4"	1-1/2"	1"	1-5/8"	1-1/16"	13-9/16"	27 LB	21M-EYE810 23M-EYE810 85-F31X-EYE810
00508-215	30,000 LB	4-3/4"	3-1/4"	1-3/4"	1-1/8"	2-1/16"	1-7/16"	17-3/8"	57 LB	23M-EYE820 27M-EYE820 29M-EYE820
00508-220	40,000 LB	5-3/4"	3-1/2"	1-3/4"	1-3/8"	2-1/2"	1-9/16"	18-1/2"	83 LB	85-F31X-EYE820 85-F32X-EYE820
00508-230	60,000 LB	6"	3-1/2"	1-3/4"	1-3/8"	2-1/2"	1-9/16"	18-1/2"	85 LB	27M-EYE840 29M-EYE840 85-F32X-EYE840
00508-240	80,000 LB	6-1/2"	4-5/8"	2-1/8"	1-3/4"	3-1/4"	2-1/4"	24-11/16"	150 LB	27M-EYE880 29M-EYE860 47M-EYE860
00508-250	100,000 LB	7-1/2"	5-1/2"	2-3/4"	2-1/8"	3-5/8"	2-5/8"	26-3/8"	230 LB	-
00508-260	120,000 LB	7-1/2"	5-1/2"	2-3/4"	2-1/8"	3-9/16"	2-1/4"	28-1/2"	250 LB	27M-EYE880 29M-EYE860 47M-EYE860
00508-280	160,000 LB	9"	6"	3-1/4"	2-1/2"	4-13/16"	2-7/8"	33-7/8"	380 LB	27M-EYE880