



THE FASTBACK® SYSTEM

Direct pullback for shots up to 12" without ever removing the drillhead.

Reduce production time and cost when reaming up to a 12" hole in tight conditions by using direct pullback's best solution...the FastBack System. It is a complete solution comprising the SD Housing, detachable cutter blocks, pulling device, and optional swivel.

Drill Head



Cutter Blocks



Pullback Device



Swivel



Details and part numbers for the SD Housings are on pages 16-17.

WORK IN LIMITED SPACE

Using the FastBack System in tight spaces such as suburban street-to-house shots, will enable you to backream and pullback without having to remove the drill head.



SPEED UP PRODUCTION

Bolt-on FastReam® cutter blocks allow you to backream the hole without ever removing the drill head. That's right...you can make your installs faster than ever before when reaming a 12" hole or less.



**INCREASE PRODUCTION.
DRILL IN TIGHTER SPACES.
BE MORE PROFITABLE.**



Scan the QR code to watch the tutorial on how to assemble the FastBack System.



DRILLHEAD SYSTEMS | **FASTBACK**®

HOUSINGS

BITS & BLADES

QUICK-DISCONNECTS

REAMERS

SWIVELS

PULLERS

ADAPTERS & SUBS

PARTS



EAGLE EYES

Fast Pullback Using Your Eagle Claw Or Iron Fist Bit

Be ready for direct pullback in a matter of minutes. Bolt your Eagle Eye onto your Eagle Claw or 5" Iron Fist bit for direct pullbacks and provide a secure link that keeps the swivel straight and on the center line.

EAGLE EYE




EAGLE EYE LT



Now there are 2 options for Eagle Eye Pullback

Eagle Eye LT offers a low profile that hugs the bit's steerface

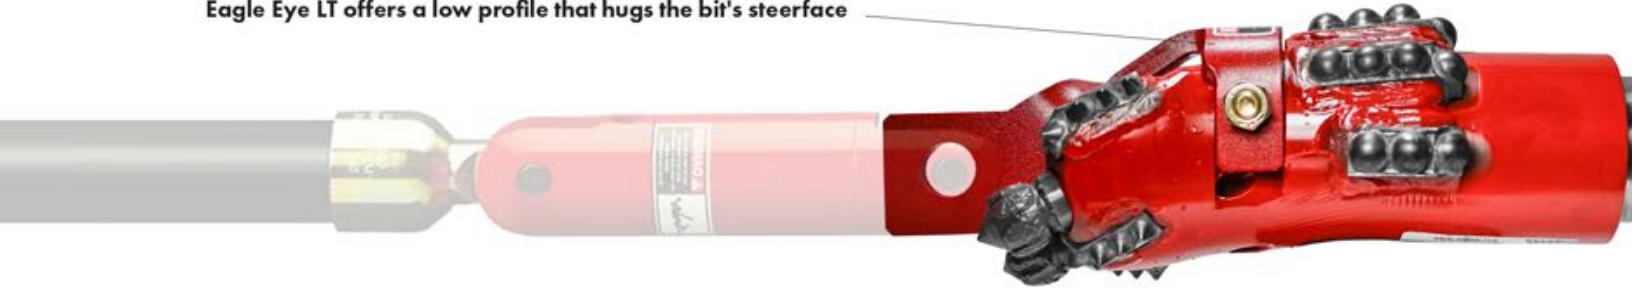

NEW Eagle Eye LT		
Hard Ground Bit	Eagle Eye LT Part #	Replacement Bolt & Nut Part #
3.5" Eagle Claw	EC35-FBLT1-305	HHCS5/16X3.75, 5/16-NUT
4.25" Eagle Claw	EC42-FBLT1-305	HHCS7/16X4.50, 7/16-NUT
5" Eagle Claw	EC50-FBLT-305	HHCS1/2X5.00, 1/2-NUT
5" Iron Fist	EC50-FBLT-305	HHCS1/2X5.00, 1/2-NUT

Eagle Eye		
Eagle Claw Size	Eagle Eye Part#	Replacement Bolt
3.5"	EC35-FB42A1-305	FHHCS5/16X3.75
4.25"	EC42-FB50A1-305	FHHCS-.4375-4.25
5"	EC50-FB60-310	FHHCS1/2X5



QUICK-SWIVEL & QUICK-LINK

Fast, & Secure Direct Pullback Without Removing The Blade. Engineered To Hold The Swivel Rotation On Center.

Quick Swivel				
Pullback Capacity	Part #	Replacement Bolt	Nut Part #	Washer Part #
5 ton	00503-205-QS	HHCS-3/4-2.75-8	3/4-10-NUT	3/4 WASHER



Quick Link				
Swivel Being Used	Part #	Replacement Bolt	Nut Part #	Washer Part #
00503-205, 5-ton Valu-DUB Swivel	QL-305	HHCS-3/4-2.75-8	3/4-10-NUT	3/4 WASHER
00503-210, 10-ton Valu-DUB Swivel	QL-310	HHCS-3/4-2.75-8	3/4-10-NUT	3/4 WASHER





FASTREAM® CUTTER BLOCKS

Ream Up To A 12" Hole Without Ever Taking Off The Drill Head.

Fastream Cutter Blocks		
Housing Diameter	Cutting Diameter	Part Number
2.5"	4.5"	FR-250-EX-45
2.5"	6"	FR-250-TE-47-60
2.5"	8"	FR-250-TE-47-80
2.5"	10"	FR-250-TE-57-10
2.75"	6"	FR-275-TE-47-60
2.75"	8"	FR-275-TE-47-80
2.75"	10"	FR-275-TE-57-10
2.75"	12"	FR-275-TE-80-12
3.25"	6"	FR-325-EX-35-60
3.25"	8"	FR-325-TE-57-80
3.25"	10"	FR-325-TE-57-10
3.25"	12"	FR-325-TE-80-12

EX SERIES CUTTERS



EX series cutters are lower profile and use similar carbide blocks to our Iron Fist Bit.



TE SERIES CUTTERS



TE series cutters are designed after our best-selling reamer, the Tornado on pg. 35

FastReam Cutter Blocks are compatible with Bolt-on, Thread-on, and Tri-Con™ Melfred Borzall Housings found on pages 16-17.